



SPAX nail plugs

For quick and easy
impact installation

SPAX INDOOR

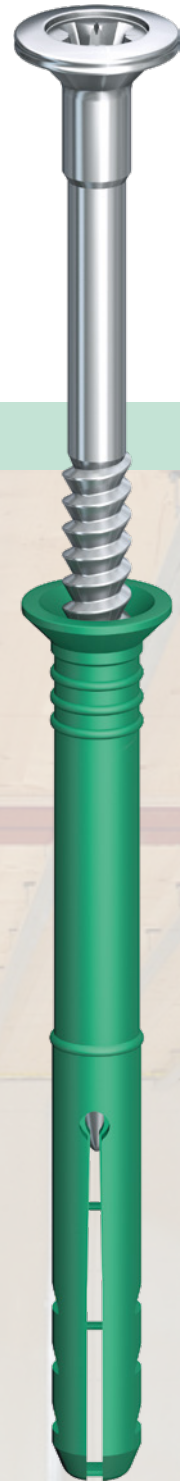

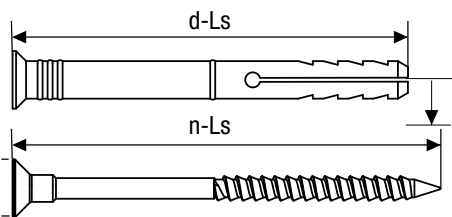

SPAX nail plug, flat countersunk head

Type ND

Plug and nail screw

Nylon, galvanised steel

Dimensions [mm]					Packaging units			SPAX No.	EAN code
Thread- Ø	Length total	Bit size	Min. drive depth	Max. effective length	SPAX Box [pieces]	Master carton [pieces]]	Pallet qty		
d1	Ls	Z							
Standard Package									
6.0	40	2	25	15	200	2,000	64,000	4861080600405	4003530271748
	60	2	25	35	200	2,000	64,000	4861080600605	4003530271755
8.0	80	3	40	40	200	1,000	32,000	4861080800805	4003530271762
	100	3	40	60	200	1,000	32,000	4861080801005	4003530271779
Craft Package									
6.0	40	2	25	15	50	150	65,100	4861080600406	4003530266980
	60	2	25	35	50	150	33,600	4861080600606	4003530266997
8.0	80	3	40	40	50	150	28,800	4861080800806	4003530267000
	100	3	40	60	50	150	24,000	4861080801006	4003530267017

HEAD

Precise drive for removal

NEW

SHANK

Reinforced shank area, reliably prevents bending during hammering

SPECIAL THREAD

Guarantees easy installation / hammering

COUNTERSUNK COLLAR


Enables flush installation of wooden structures

PLUG WITH EXPANSION ELEMENT

High-quality nylon – stable, durable and highly resilient, secure anchoring in construction material

Pull-out forces in the following construction materials:[kN]

Plug Ø	Ø 6 mm	Ø 8 mm
Concrete, class 25	1.4	2.1
Masonry brick, class 20	1.3	1.9
Solid lime sand brick, class 20	1.1	1.7

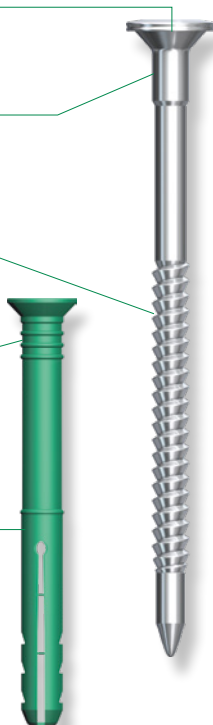

The advantages:

- Time-saving push-through installation through pre-assembled nail screw in plug.
- PZ drive enables easy dismantling.
- Suitable for fastening wood and lightweight profiles.
- Ideal for series assembly.
- High holding values through optimal expanding effect.

SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GROUP SINCE 1823

Kölner Strasse 71 – 77 · 58256 Ennepetal · Germany
Tel.: +49 2333 799-1967 · Fax: +49 2333 799-199
info@spax.com · www.spax.com